

FIGURE 1A

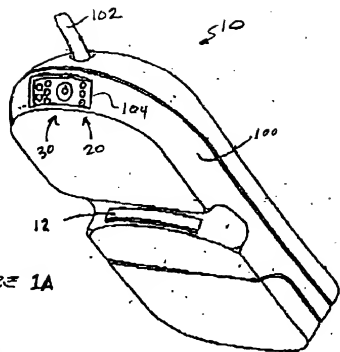


FIGURE 1B

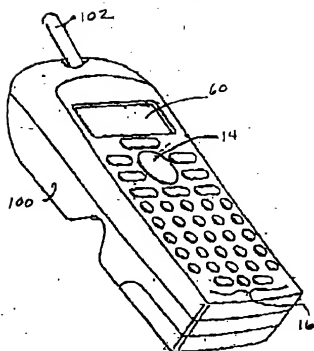


FIGURE 1C

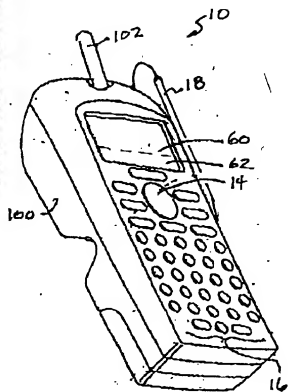
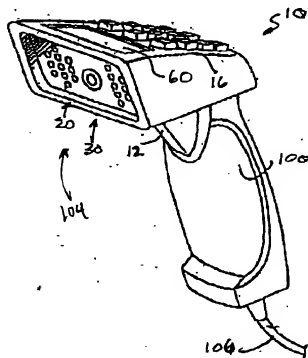


FIGURE 1D



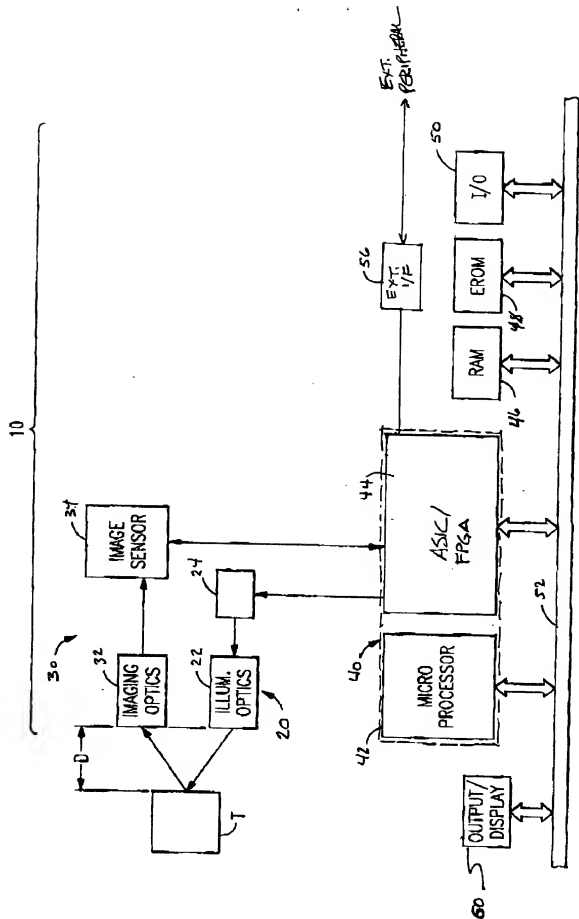


FIG. 2

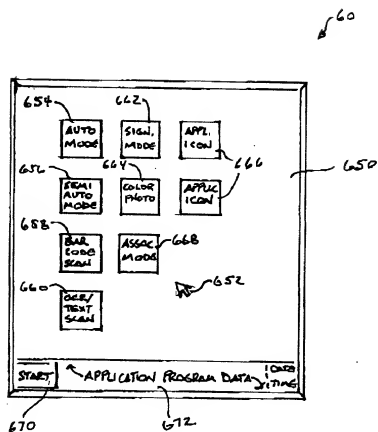


FIGURE 3

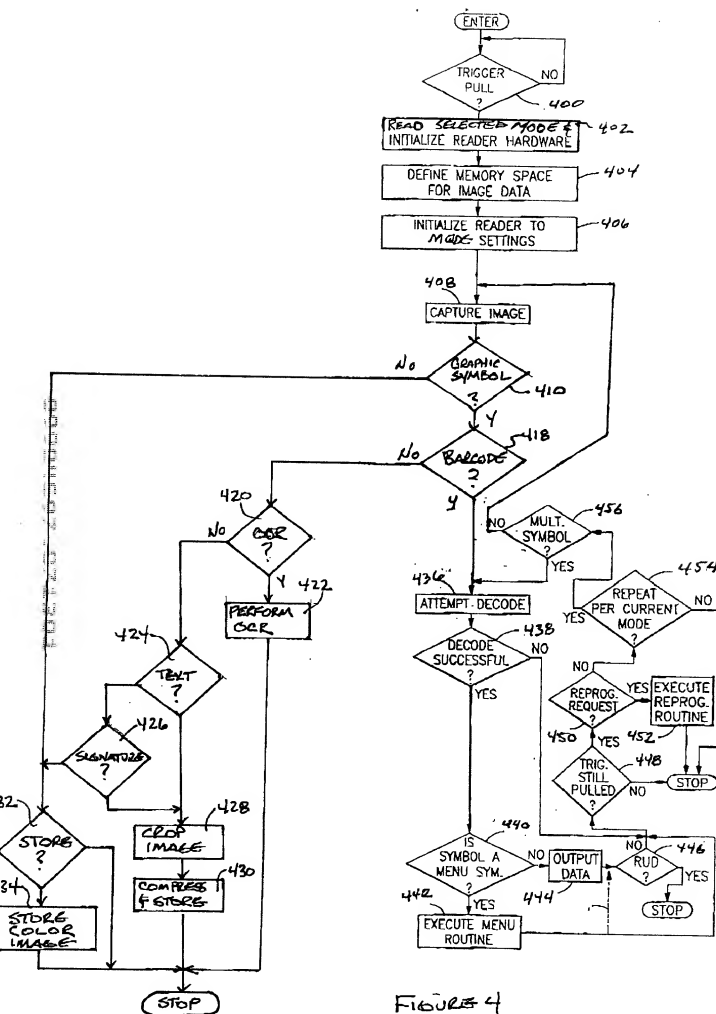


FIGURE 4

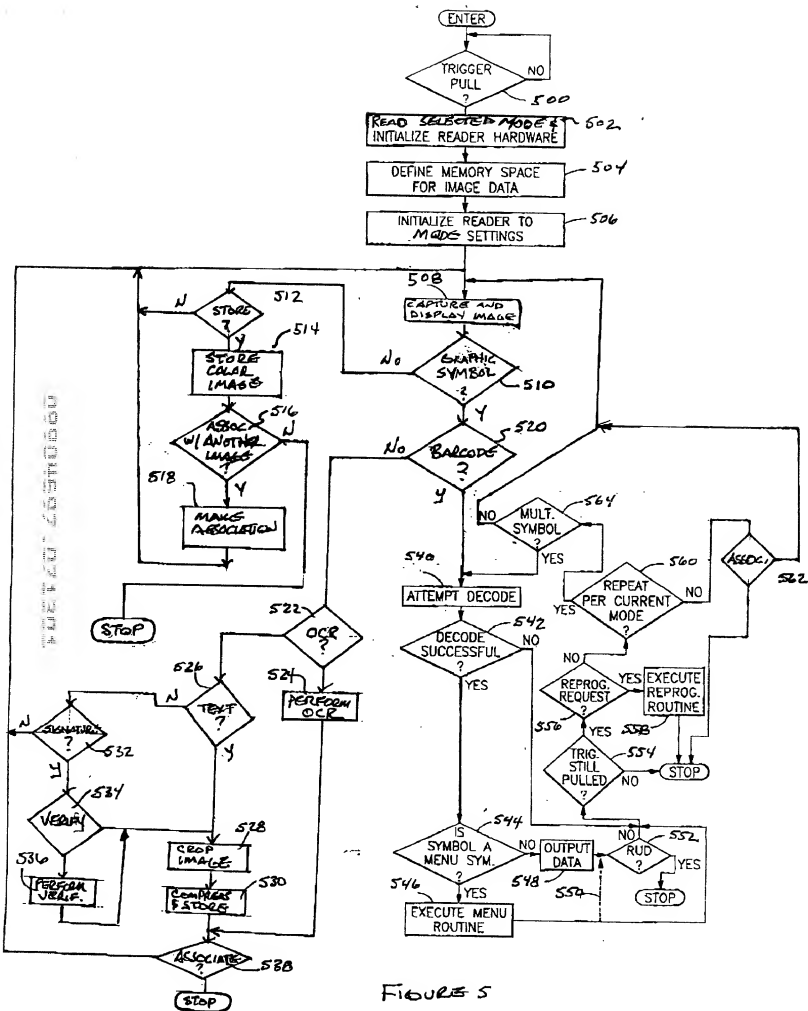


FIGURE 5




FIGURE 6A

OPTIONS (OFFSET) TABLE

- A. COMMUNICATIONS OPTIONS
 - 1. RS-232
 - 2. BAUD RATE
 - 3. RF LINK
 - 4. ETHERNET
- B. CODE OPTIONS
 - 1. DISABLE 1D
 - 2. DISABLE 2D
 - 3. DISABLE INDIV.
 - 4. MIN-MAX LENGTH
 - 5. MULTIPLE SYMBOLS ENABLED
- C. SCANNING-DECODING OPTIONS
 - 1. ONE SHOT
 - 2. REPEAT UNTIL DONE
 - 3. REPEAT UNTIL STOPPED
 - 4. SCAN ON DEMAND
 - 5. SKIP SCAN
 - 6. DECODE ON DEMAND
- D. OPERATING OPTIONS
 - 1. BEEPER VOLUME
 - 2. AIMING LED ON/OFF
 - 3. AURAL FEEDBACK
- E. TRANSMIT OPTIONS
 - 1. SEND CHECK CHAR'S
 - 2. SEND CHECKSUM
 - 3. DATA EDIT OPTIONS

F. READER MODE OPTIONS

- 1. Automatic
- 2. Semi-Automatic
- 3. Bar Code Scanning
- 4. OCR
- 5. Signature
- 6. Color Imaging

OP CODE TABLE

- A. OP CODE "0"-VECTOR PROC.
 - 1. OUTPUT VERSION OF SOFTWARE
 - 2. OUTPUT CONTENTS OF PARAMETER TABLE
 - 3. DISPLAY ENABLED CODES
 - 4. PRINT PARAMETER TABLE AS BAR CODE SYMBOL
- B. OP CODE "1" - CLEAR
- C. OP CODE "2" - SET
- D. OP CODE "3" - TOGGLE
- E. OP CODE "4" - ADD
- F. OP CODE "5" - DEFAULT
- G. OP CODE "6" - LOAD
- H. OP CODE "7" - RESERVED

FIGURE 6C

FIGURE 6B

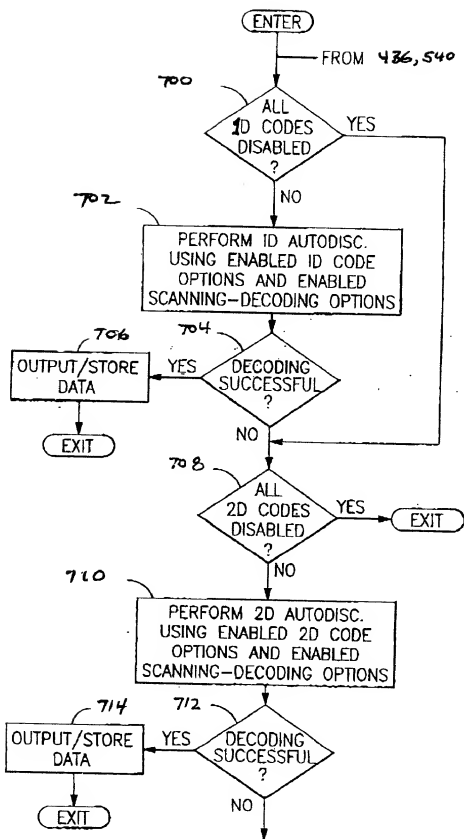


FIGURE 7

FROM 1D DECODE

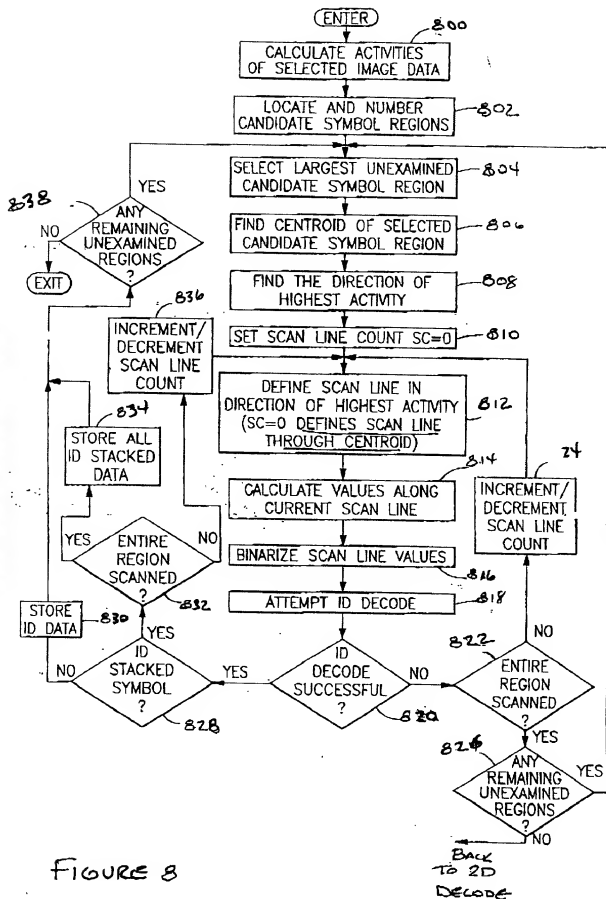


FIGURE 8

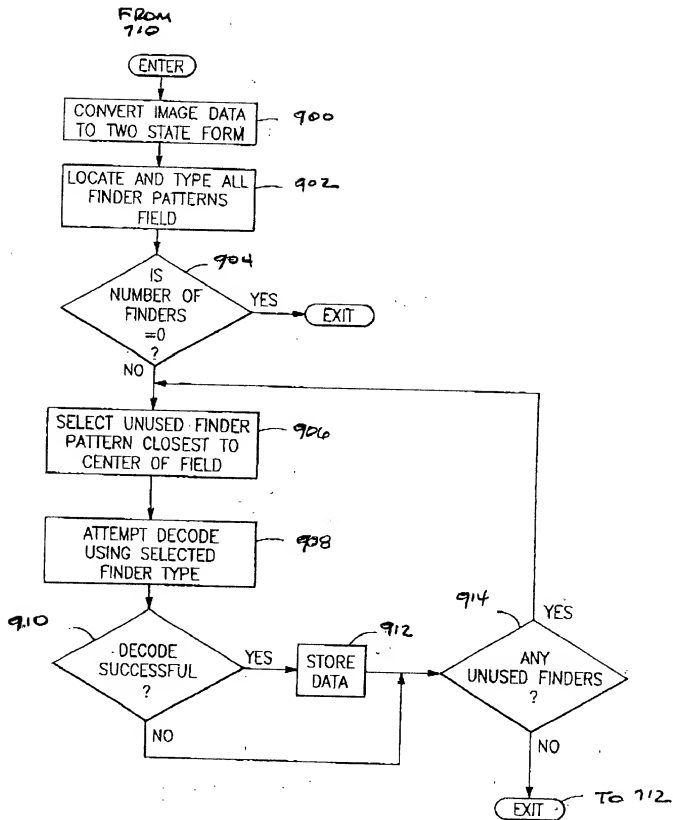


FIGURE 9

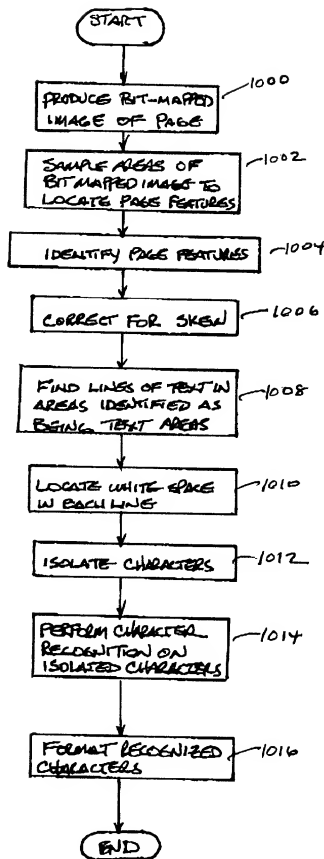


FIGURE 10

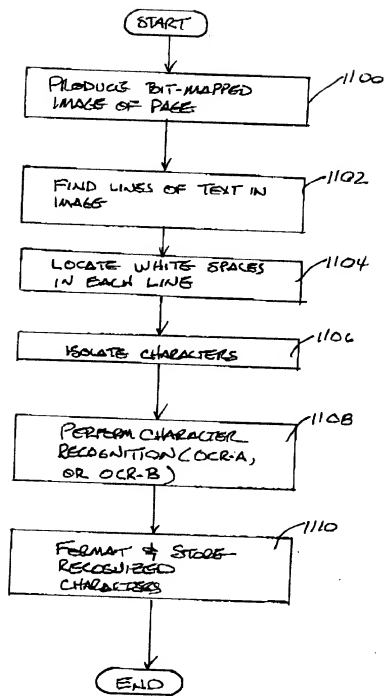


FIGURE 11

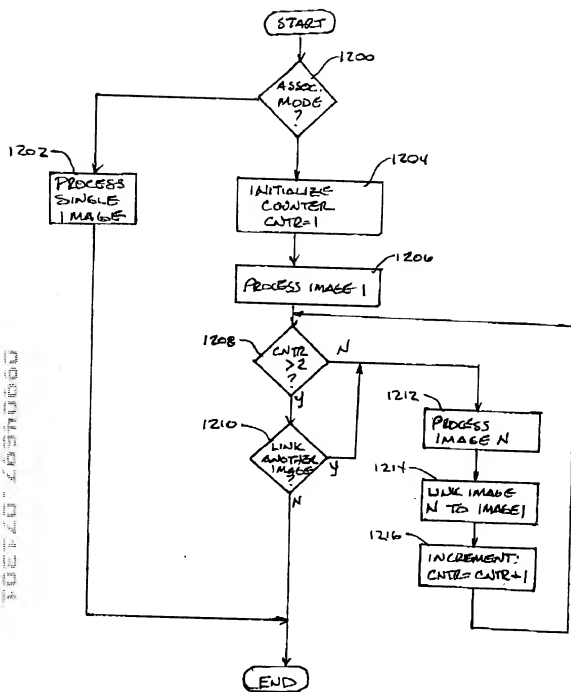


FIGURE 12

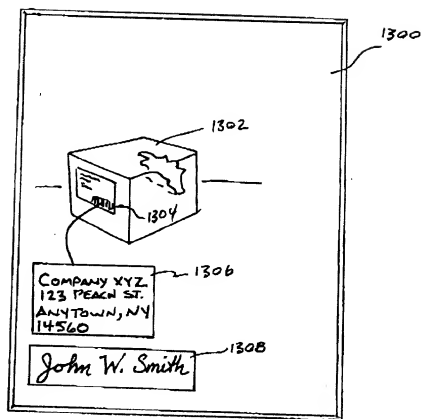


FIGURE 13

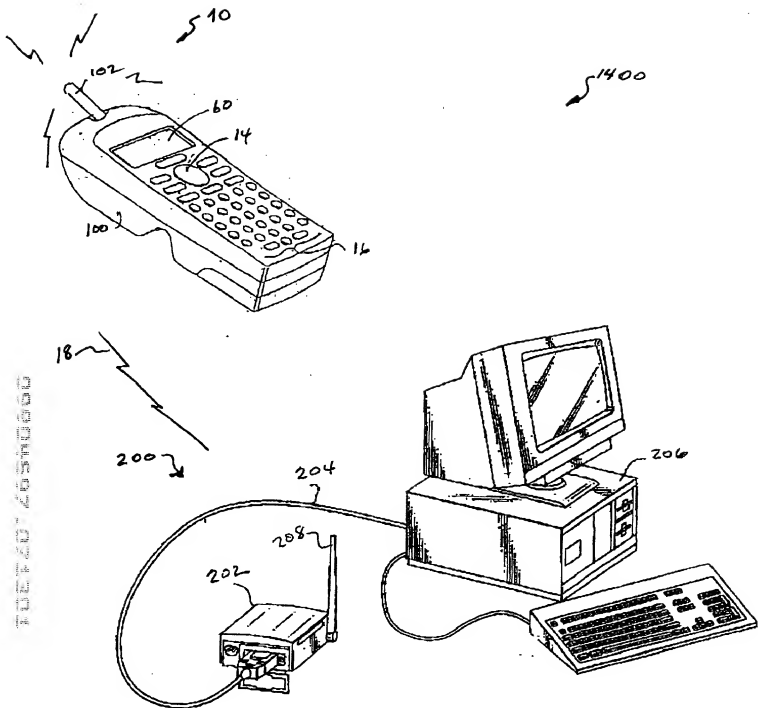


FIGURE 14

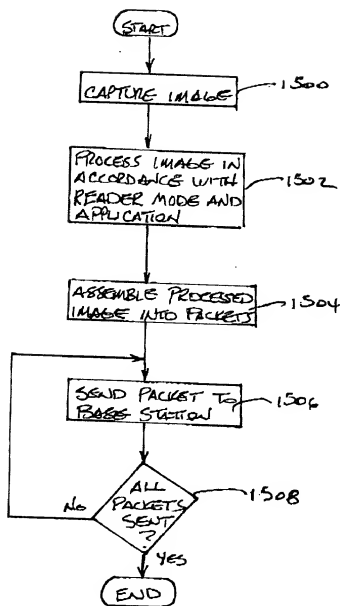


FIGURE 15




FIGURE 16A

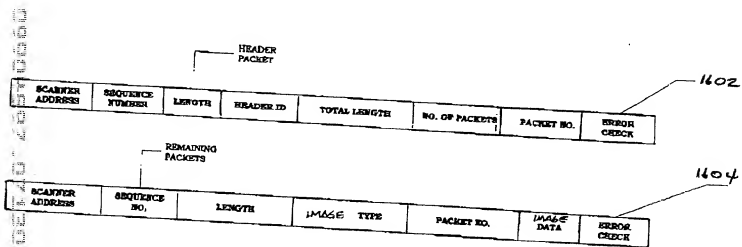


FIGURE 16B

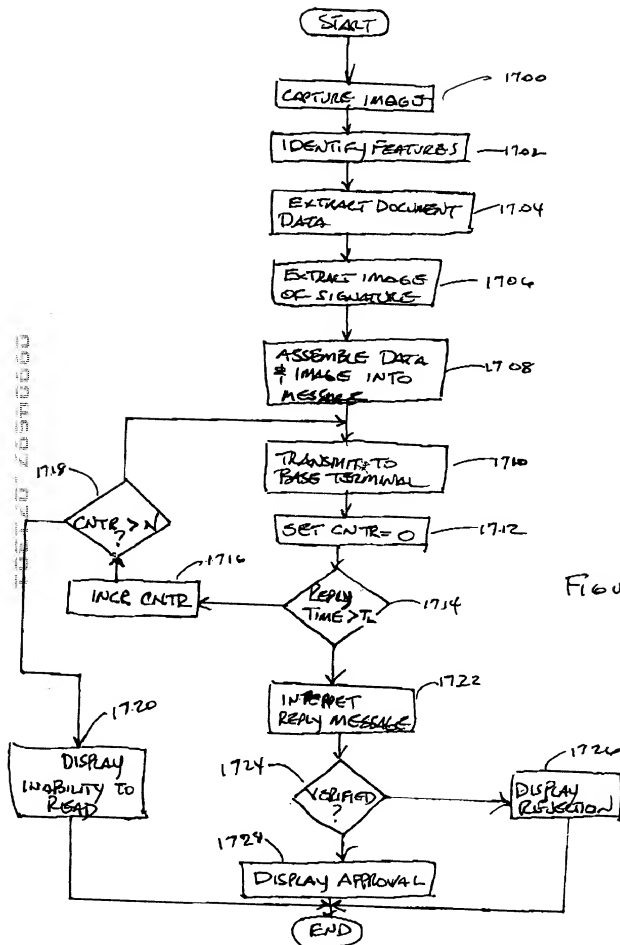


FIGURE 17

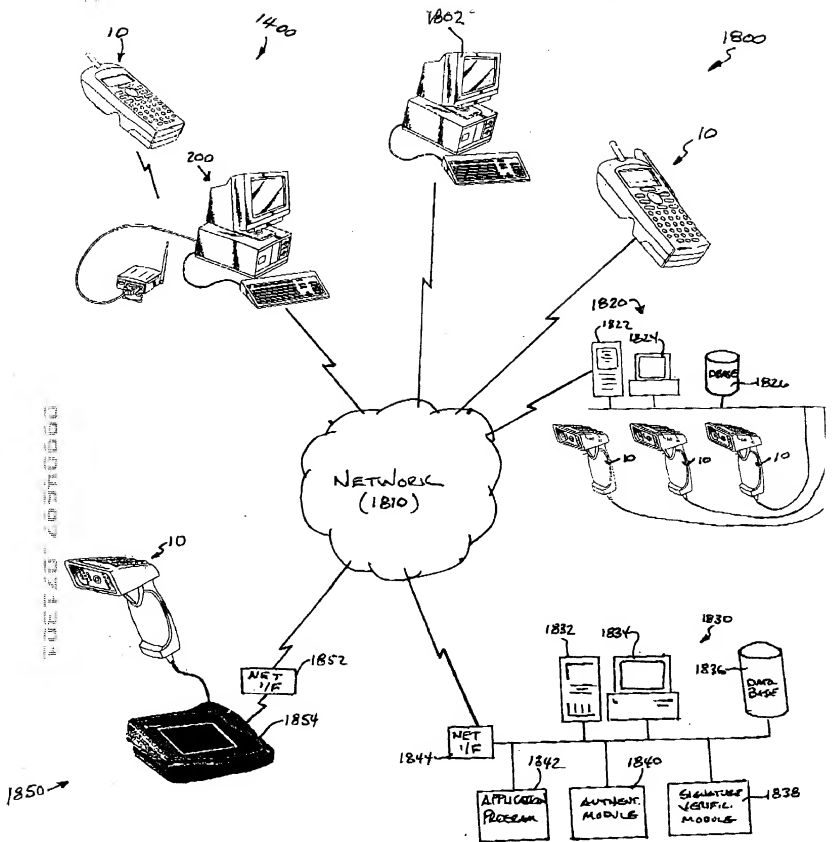


FIGURE 18